GradeMax

* 0000800000001 * DFD

Cambridge Assessment International Education

Cambridge International AS & A Level

CANDIDATE NAME

CENTRE NUMBER

CANDIDATE NUMBER

* 2 1 3 4 2 7 7 1 2 1 *

COMPUTER SCIENCE **9618/33**

Paper 3 Advanced Theory **October/November 2025**

1 hour 30 minutes

You must answer on the question paper.

No additional materials are needed.

INSTRUCTIONS

- Answer **all** questions.
- Use a black or dark blue pen.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do **not** use an erasable pen or correction fluid.
- Do **not** write on any bar codes.
- You may use an HB pencil for any diagrams, graphs or rough working.
- Calculators must **not** be used in this paper.

INFORMATION

- The total mark for this paper is 75.
- The number of marks for each question or part question is shown in brackets [ ].
- No marks will be awarded for using brand names of software packages or hardware.

This document has **12** pages. Any blank pages are indicated.

DC (PB/SW) 346646/2
© UCLES 2025

[Turn over

GradeMax

1 **(a)** An enumerated data type, `Spectrum`, is required to hold the names of colours.

(i) Write the **pseudocode** statement for the type declaration of `Spectrum` to hold the names of the colours available:

Red, Orange, Yellow, Green, Blue, Indigo, Violet.

.....

..... [2]

(ii) Identify **two** characteristics of the list of values given in an enumerated data type declaration.

1 .....

.....

2 .....

.....

[2]

(b) `ColourData` is a composite data type to store definitions of colours.

Write **pseudocode** statements to declare `ColourData` to hold the following fields:

Field	Example data
ColourCode	`XYZ12345`
Colour	`Red`
Wavelength	`650`
Frequency	`4.62`
PrimaryColour	`Yes`

Use the most appropriate data type in each case, including the enumerated data type `Spectrum` from part **a(i)**.

.....

.....

.....

.....

.....

.....

.....

..... [4]

DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN

GradeMax

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

2 Numbers are stored in a computer system using binary floating-point representation with:

- 12 bits for the mantissa
- 4 bits for the exponent
- two's complement form for both the mantissa and the exponent
- 2 bytes in total.

(a) Outline the effect of changing the number of bits used to store the mantissa to 10 bits, in this system.

.....

.....

.....

.....

.....

..... [3]

(b) Describe **one** example of a situation that could cause an overflow to occur and the consequences of such an overflow.

.....

.....

.....

.....

.....

..... [3]

3 Describe how packet switching is used to pass messages across a network. Do **not** include checking for completeness and resending packets in your answer.

.....

.....

.....

.....

.....

.....

.....

..... [4]

GradeMax

4 Identify **and** describe **three** protocols that are used in the Application Layer of the TCP/IP protocol suite.

Protocol 1 .....

Description .....

.....

.....

Protocol 2 .....

Description .....

.....

.....

Protocol 3 .....

Description .....

.....

..... [6]

5 **(a)** State the purpose of multi-tasking.

.....

..... [1]

(b) Explain how an operating system ensures that multi-tasking operates efficiently.

.....

.....

.....

.....

.....

..... [3]

DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN DO NOT WRITE IN THIS MARGIN

GradeMax

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

6 **(a)** The Karnaugh map (K-map) represents a logic circuit with four inputs.

CD \ AB	00	01	11	10
00	0	0	0	0
01	1	1	1	0
11	0	1	1	1
10	0	0	1	1

(i) Draw loop(s) around appropriate group(s) in the K-map to produce an optimal sum-of-products. [3]

(ii) Write the Boolean expression from your answer to part **a(i)** as a simplified sum-of-products. Do **not** carry out any further simplification.

.....

..... [2]

(b) Simplify the following expression using De Morgan's laws and Boolean algebra.

Show all the stages in your simplification.

$\mathbf{X} = \overline{\mathbf{A}+\mathbf{B}+\mathbf{C}}+\overline{\overline{\mathbf{B}}+\mathbf{C}}$

.....

.....

.....

.....

.....

..... [3]

GradeMax

7 **(a)** Outline the process of optimisation during the compilation of a program.

.....

.....

.....

..... [2]

(b) Write the Reverse Polish Notation (RPN) for the given infix expression:

((6 + 12) / (16 – 10)) * 18

.....

.....

.....

.....

.....

..... [3]


(c) The RPN expression

```
c a – b d + * b c + /
```

is to be evaluated, where:

`a = 4`, `b = 12`, `c = 24` and `d = 6`.

Show the changing contents of the stack as the RPN expression is evaluated.

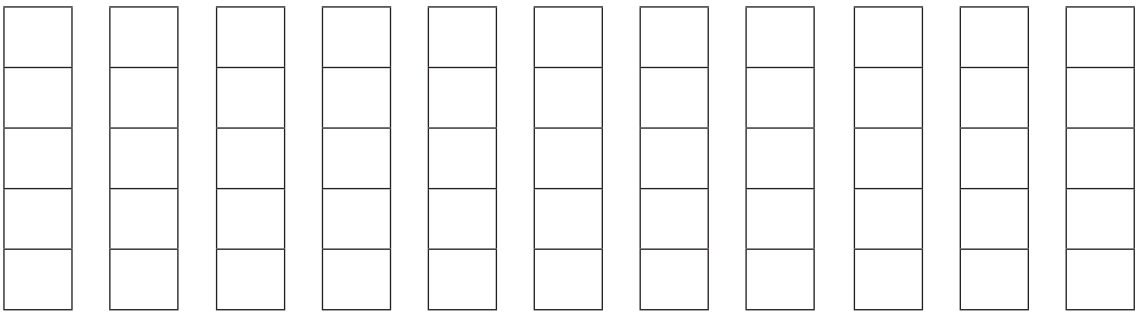


[4]

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

GradeMax

8 Calculate the shortest distance between the **Start** node and each of the nodes in the graph using Dijkstra's algorithm.

Show your working on the graph **or** in the working space. Write your answers in the table provided.

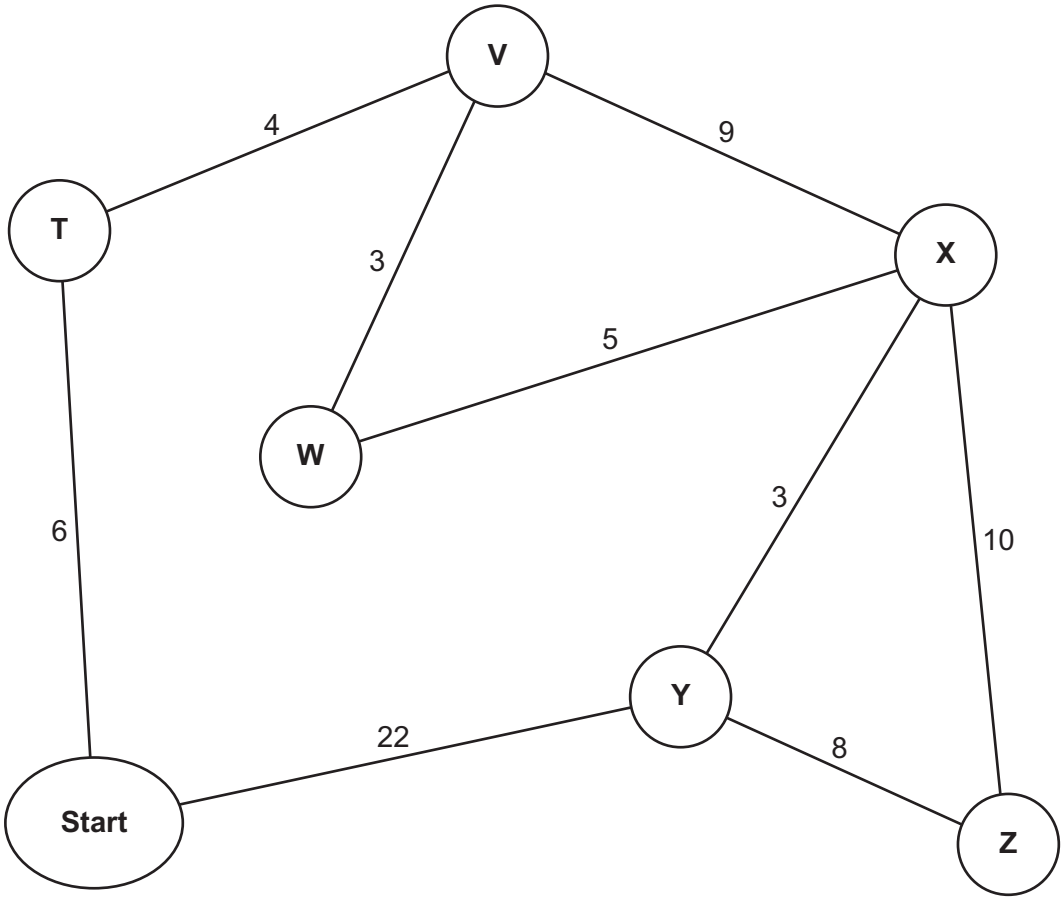

Working .....

.....

.....

.....

.....

.....

Answers:

T	V	W	X	Y	Z

[5]

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

GradeMax

9 A company requires a digital certificate to ensure the authenticity of its online communications.

Outline the process followed to acquire a digital certificate.

.....

.....

.....

.....

.....

.....

.....

.....

.....

..... [4]

10 A stack, `StackArray`, is to be implemented using pseudocode, to store a maximum of 100 string items in an appropriate array. Declarations are required so that the stack has a beginning, an end and a maximum size. An array is also required to store the data.

(a) Write **pseudocode** to declare the variables, constant and array required to implement the stack.

.....

.....

.....

.....

.....

..... [3]

(b) Write **pseudocode** for a procedure to initialise the top and bottom pointers of the stack to appropriate values.

.....

.....

.....

.....

.....

..... [3]

DO NOT WRITE IN THIS MARGIN

GradeMax

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

11 Describe when the use of recursion would be beneficial **and** give an example.

Description .....

.....

.....

.....

Example .....

.....

[3]

12 An exception can occur when running a program.

(a) Explain what is meant by an exception.

.....

.....

.....

.....

.....

..... [3]

(b) Identify **one** example of an exception and give **one** reason why the exception may cause a problem.

Example .....

.....

Reason .....

.....

[2]

GradeMax

13 The table shows assembly language instructions for a processor that has one register, the Accumulator (ACC).

Label	Instruction		Explanation
	Opcode	**Operand**	
	LDM	#n	Load the number n to the ACC
	LDD	<address>	Load the contents of the location at the given address to the ACC
	LDI	<address>	The address to be used is at the given address. Load the contents of this second address to the ACC
	ADD	<address>	Add the contents of the given address to the ACC
	ADD	#n	Add the number n to the ACC
	SUB	<address>	Subtract the contents of the given address from the ACC
	SUB	#n	Subtract the number n from the ACC
	STO	<address>	Store the contents of the ACC at the given address
<label>:		<data>	Gives a symbolic address <label> to the memory location with the contents <data>
# denotes a denary number, e.g. #123 <label> can be used in place of <address>			

The current contents of memory are:

Address	Contents
563	125
899	63

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

GradeMax

Write **assembly language** code, using **only** the given instruction set to:

- store the denary value `250` as labelled variable `X`
- store the value stored in location 563 as labelled variable `Y`
- add the value stored in variable `X` to the value stored in variable `Y`
- subtract the value stored in location 899 from the current value in the Accumulator
- store the result in variable `Total`.

Show the initialisation and values of the variables `X`, `Y` and `Total` in the table provided.

.....

.....

.....

.....

.....

.....

.....

.....

Label	Content

[7]

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

GradeMax

BLANK PAGE

DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN
DO NOT WRITE IN THIS MARGIN

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of Cambridge Assessment. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which is a department of the University of Cambridge.

© UCLES 2025