

M2 June 2016 (MA)

$$\text{Q1a) } \underline{t=0, v=11} : \boxed{11} = r_{//}$$

$$\underline{t=2, v=3} : 3 = 4p + 2q + 11$$

$$4p + 2q = -8_{//} \quad \sim \quad \textcircled{1}$$

$$\underline{t=2, v \text{ is min}} \therefore a = 0 :$$

$$a = \frac{dv}{dt} = 2pt + q = 0$$

$$\Rightarrow 4p + q = 0$$

$$\Rightarrow 4p = -q_{//} \quad \sim \quad \textcircled{2}$$

$$\underline{\text{sub } \textcircled{2} \text{ into } \textcircled{1}} : -q + 2q = -8$$

$$q = \boxed{-8}_{//}$$

$$\text{so } p = \frac{-(-8)}{4} = \boxed{2}_{//}$$


$$\text{at } t=3, a = 2(2)(3) - 8 = \boxed{4 \text{ ms}^{-2}}$$

b) 3rd second means from $t=2$ to $t=3$.

$$\text{distance} = \int_2^3 [2t^2 - 8t + 11] dt = \left[\frac{2t^3}{3} - 4t^2 + 11t \right]_2^3$$

$$= \left[15 \right] - \left[\frac{34}{3} \right] = \boxed{\frac{11}{3}}$$

Q2ai)

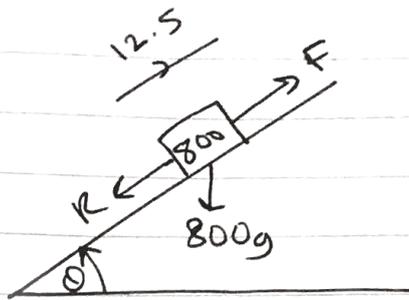

$$P = Fv$$

$$3P = 12.5(F)$$

$$F = \frac{3P}{12.5}$$

$$\rightarrow + \quad \underline{N2L(car)}: F - R - 800g \sin \theta = 0$$


$$\frac{3P}{12.5} = \frac{800g}{20} + R$$

$$P = \frac{12.5}{3} \left(\frac{800g}{20} + R \right) \quad \text{--- (1)}$$

$$P = Fv$$

$$P = 12.5F$$

$$\frac{P}{12.5} = F$$

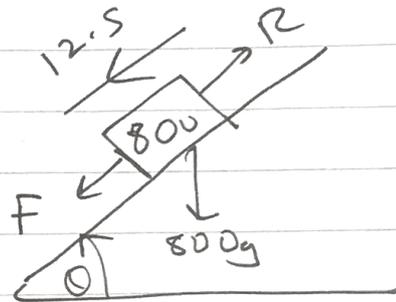

$$\leftarrow + \quad \underline{N2L(car)}: F + 800g \sin \theta - R = 0$$

$$\frac{P}{12.5} = R - \frac{800g}{20}$$

$$P = 12.5 \left(R - \frac{800g}{20} \right) \quad \text{--- (2)}$$

solve (1) and (2) simultaneously:

$$12.5 \left(R - \frac{800g}{20} \right) = \frac{12.5}{3} \left(\frac{800g}{20} + R \right)$$

$$R - 40g = \frac{40}{3}g + \frac{R}{3}$$


$$\therefore \frac{2R}{3} = \left(40 + \frac{40}{3}\right) g$$

$$R = \boxed{784 \text{ N}}$$

and from (2), $P = 12.5(784 - 40g)$

$$= \boxed{4900 \text{ W}}$$

b)

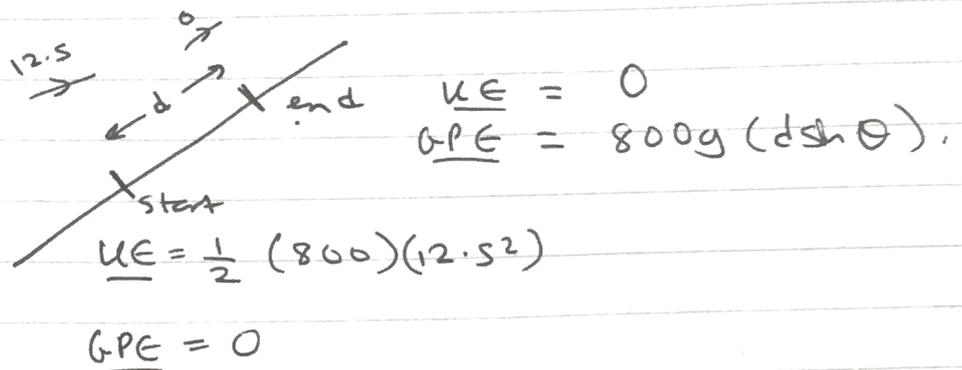

$$+ \text{W.D due to } R = R \times d = 784d$$

Conservation of energy . . .

$$400(12.5^2) = \frac{800g}{20}d + 784d$$

$$d(784 + 40g) = 400(12.5^2)$$

$$\therefore d = \frac{400 \times 12.5^2}{784 + 40g} = \boxed{53.1 \text{ m}}$$

$$Q3) \text{ Impulse} = 0.6(v-u) = 0.6(2c\mathbf{i} - c\mathbf{j} - c\mathbf{i} - 2c\mathbf{j})$$

$$\Rightarrow 0.6(c\mathbf{i} - 3c\mathbf{j}) = \text{Impulse}$$

$$\Rightarrow |0.6c\mathbf{i} - 1.8c\mathbf{j}| = 2\sqrt{10}$$


$$\Rightarrow \sqrt{(0.6c)^2 + (1.8c)^2} = 2\sqrt{10}$$

$$\Rightarrow 0.36c^2 + 3.24c^2 = (2\sqrt{10})^2$$

$$\Rightarrow 3.6c^2 = 40 \quad \therefore c^2 = \frac{40}{3.6}$$


$$\Rightarrow c = \sqrt{\frac{40}{3.6}} = \sqrt{\frac{100}{9}} = \boxed{\frac{10}{3}} \quad (c > 0)$$

Q4a) Shape Area Displacement from O along




$$\frac{\pi(4)^2}{4} = \boxed{4\pi}$$

$$\boxed{\frac{16\sqrt{2}}{3\pi}} \text{ from formula}$$



$$\frac{1}{2} \cdot 3 \cdot 3 = \boxed{\frac{9}{2}}$$

$$3\cos 45 \times \frac{1}{2} = \boxed{\frac{\sqrt{2}}{2}}$$



$$\boxed{4\pi - \frac{9}{2}}$$

$$\boxed{y}$$

$$\bar{x} \sum m_i = \sum m_i x_i$$

$$4\pi \left(\frac{16\sqrt{2}}{3\pi} \right) - \frac{9}{2} \left(\frac{\sqrt{2}}{2} \right) = (4\pi - \frac{9}{2}) (\bar{y})$$


$$\bar{y} = \frac{4(16\sqrt{2})}{3} - \frac{9\sqrt{2}}{4} = 2.951\dots$$

$$4\pi - \frac{9}{2}$$

$$\therefore \text{distance from AD} = 2.951\dots - 3\cos 45$$

$$= \boxed{0.83\text{m}}$$

b)

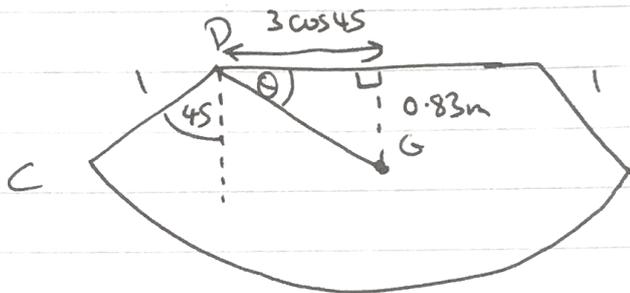


$$\tan \theta = \frac{0.83}{3\cos 45}$$

$$\therefore \theta = \tan^{-1}(0.3918\dots) = 21.4^\circ$$

$$\text{angle required} = 90 - 21.4^\circ + 45^\circ$$

$$= \boxed{114^\circ}$$

Q5ai)

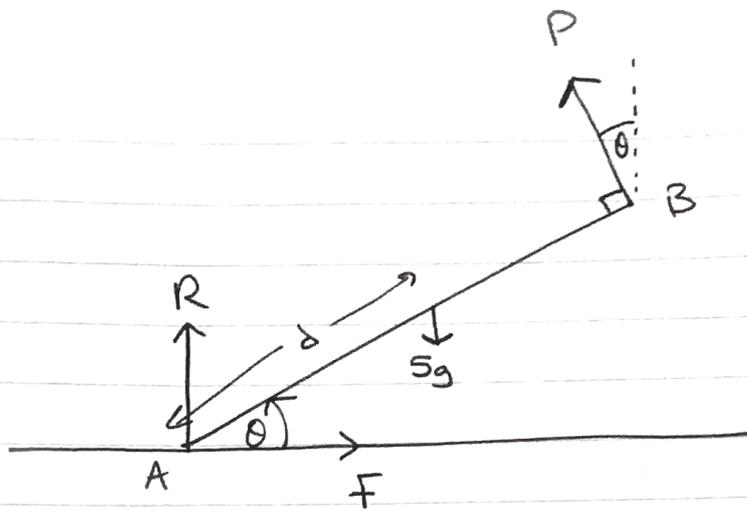

$$M(A): 5g \cos \theta (d) = P(4)$$

$$P = \frac{5gd \cos \theta}{4}$$

$$R(\uparrow): P \cos \theta + R = 5g \quad \text{--- (1)}$$

$$R(\leftrightarrow): F = P \sin \theta \quad \text{--- (2)}$$

$$\textcircled{1}: R = 5g - P \cos \theta = 5g - \frac{5gd \cos^2 \theta}{4}$$

$$R = 5g \left(1 - \frac{d}{4} \cos^2 \theta\right)$$

ii) limiting equilibrium $\therefore F = \mu R$

$$\textcircled{2}: \text{but } F = P \sin \theta = \frac{5gd \sin \theta \cos \theta}{4}$$


$$b) F = \frac{1}{2} R : \frac{5gd \sin \theta \cos \theta}{4} = \frac{5g}{2} \left(1 - \frac{d}{4} \cos^2 \theta\right)$$

$$d \sin \theta \cos \theta = 2 - \frac{d}{2} \cos^2 \theta$$

$$\tan \theta = \frac{5}{12}$$

$$\therefore \sin \theta = \frac{5}{13}$$

$$\cos \theta = \frac{12}{13}$$



$$\Rightarrow d(\sin \theta \cos \theta + \frac{1}{2} \cos^2 \theta) = 2$$

$$\Rightarrow d = \frac{2}{\sin \theta \cos \theta + \frac{1}{2} \cos^2 \theta} = \frac{2}{(\frac{5}{13})(\frac{12}{13}) + \frac{1}{2} (\frac{12}{13})^2}$$

$$= \boxed{\frac{169}{66}}$$

Q6a) $\mathbf{r} = \begin{pmatrix} 3t \\ 4t - \frac{9}{2}t^2 \end{pmatrix} = \begin{pmatrix} \lambda \\ -\lambda \end{pmatrix}$ $\left. \begin{matrix} \uparrow \\ \uparrow \\ \uparrow \\ \uparrow \end{matrix} \right\} \begin{matrix} s = y \\ u = 4 \\ v = \\ a = -9 \\ t = t \end{matrix} \right\} y = 4t - \frac{9}{2}t^2$

↑
expressing
position as a vector.

$$\text{so } 3t = \lambda \quad \text{and} \quad 4t - 4.9t^2 = -\lambda$$

$$t = \frac{\lambda}{3}$$

$$\Rightarrow \frac{4}{3}\lambda - 4.9\left(\frac{\lambda^2}{9}\right) + \lambda = 0$$

$$\Rightarrow \frac{4}{3}\lambda + \lambda = \frac{49}{90}\lambda^2$$


$$\Rightarrow \frac{49}{90} \lambda = \frac{7}{3} \quad \therefore \lambda = \frac{7}{\frac{49}{90}} = \boxed{\frac{30}{7}}$$

bi) from (a), $t = \frac{\lambda}{3} = \frac{10}{7} =$ time at A.

horizontal speed = constant = 3 ms^{-1}

finding vertical component:

$$\left. \begin{array}{l} s = \\ u = 4 \\ v = v \\ a = -g \\ t = \frac{10}{7} \end{array} \right\} \begin{array}{l} v = u + at \\ v = 4 - \frac{10g}{7} = -10 \text{ ms}^{-1} \end{array}$$




$$\begin{aligned} \text{speed} &= \sqrt{(10)^2 + (3)^2} \\ &= \sqrt{109} \text{ ms}^{-1} \\ &= \boxed{10.4} \text{ m/s.} \end{aligned}$$

$$\begin{aligned} \text{direction: } \tan \theta &= \frac{10}{3} \quad \therefore \theta = \arctan\left(\frac{10}{3}\right) \\ &= 73.3^\circ \end{aligned}$$

so P is moving at 73.3° below the horizontal

Q7a)

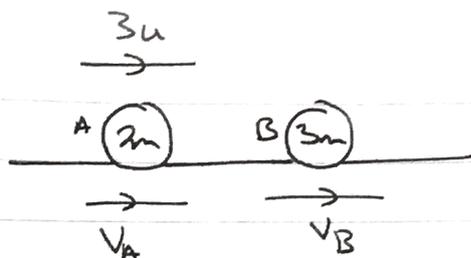

$$e = \frac{3}{4}$$

C.L.M : $2m(3u) = 2m(v_A) + 3m(v_B)$
 $6u = 2v_A + 3v_B$ — (1)

N.I.L : $\frac{3}{4} = \frac{v_B - v_A}{3u}$

$$\frac{9u}{4} = v_B - v_A$$

$$\stackrel{\times 2}{\Rightarrow} \frac{9u}{2} = 2v_B - 2v_A$$
 — (2)

(1) + (2) : $\left(\frac{9}{2} + 6\right)u = 5v_B$

$$\frac{\frac{21}{2}u}{5} = v_B = \boxed{\frac{21u}{10}}$$

and $v_A = v_B - \frac{9u}{4} = -\frac{3u}{20}$ → speed = $\boxed{\frac{3u}{20}}$

b) $I = m(v - u)$

$$\frac{27}{4} \text{ Wh } = 3 \text{ Wh } \left(\frac{21u}{10} e + \frac{21u}{10} \right)$$

$$\frac{27}{12} = \frac{21}{10} e + \frac{21}{10}$$

$$\therefore e = \frac{\frac{27}{12} - \frac{21}{10}}{\frac{21}{10}} = \boxed{\frac{1}{14}}$$

$$c) \text{ final speed of B} = \frac{21u}{10} \times \frac{1}{14} = \frac{3u}{20}$$

$$\text{speed of A} = \text{speed of B}$$

so no further collision.

