

CAMBRIDGE INTERNATIONAL EXAMINATIONS**Cambridge International Advanced Level****MARK SCHEME for the October/November 2015 series****9608 COMPUTER SCIENCE****9608/43**

Paper 4 (Written Paper), maximum raw mark 75

This mark scheme is published as an aid to teachers and candidates, to indicate the requirements of the examination. It shows the basis on which Examiners were instructed to award marks. It does not indicate the details of the discussions that took place at an Examiners' meeting before marking began, which would have considered the acceptability of alternative answers.

Mark schemes should be read in conjunction with the question paper and the Principal Examiner Report for Teachers.


Cambridge will not enter into discussions about these mark schemes.

Cambridge is publishing the mark schemes for the October/November 2015 series for most Cambridge IGCSE[®], Cambridge International A and AS Level components and some Cambridge O Level components.

® IGCSE is the registered trademark of Cambridge International Examinations.

Page 2	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

1 (a) (i)

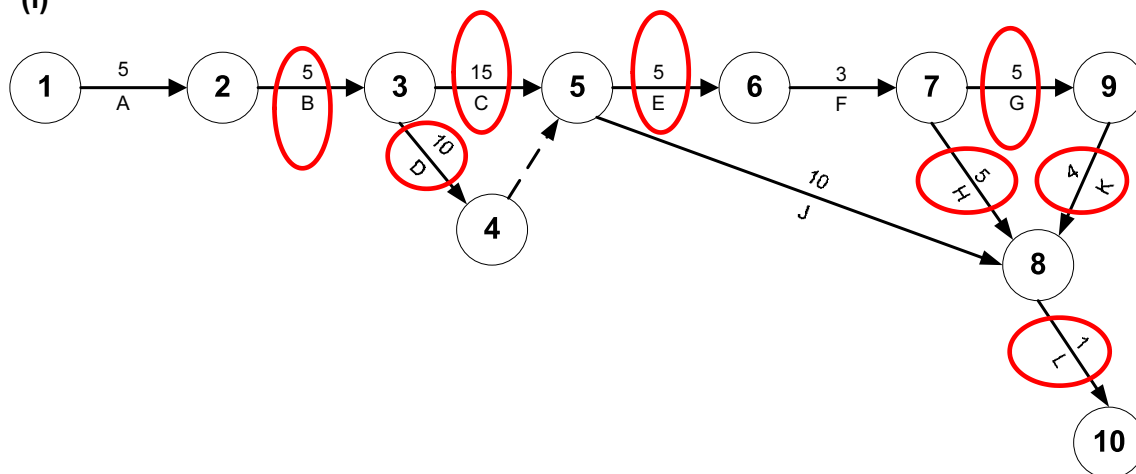

[max. 7]

(ii) 1 – 2 – 3 – 5 – 6 – 7 – 9 – 8 – 10

1–5 scores 1

6–10 scores 1

[2]

(iii) 43 weeks

[1]

(b) (i) week number 25

[1]

(ii) week number 32

[1]

(c) To see what activities can be done in parallel // show dependencies
To record changes to project timings


[max. 1]

Page 3	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

- 2 (a) `parent(philippe, meena).`
`parent(gina, meena).` [2]
- (b) **ahmed, aisha, raul** [2]
- (c) `father(F, ahmed).` [1]
- (d) `mother(X, Y)`
`IF`
`female(X) AND parent(X, Y).` [2]
- (e) `grandparent(W, Z)`
`IF`
`parent(W,X)`
`AND parent(X,Z).` [2]
- (f) `grandfather(G, K)`
`IF`
`male(G) AND`
`grandparent(G, K).`
- alternative:**
- `father(G, X) AND`
`parent(X, K).` [2]

Page 4	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

3 (a)

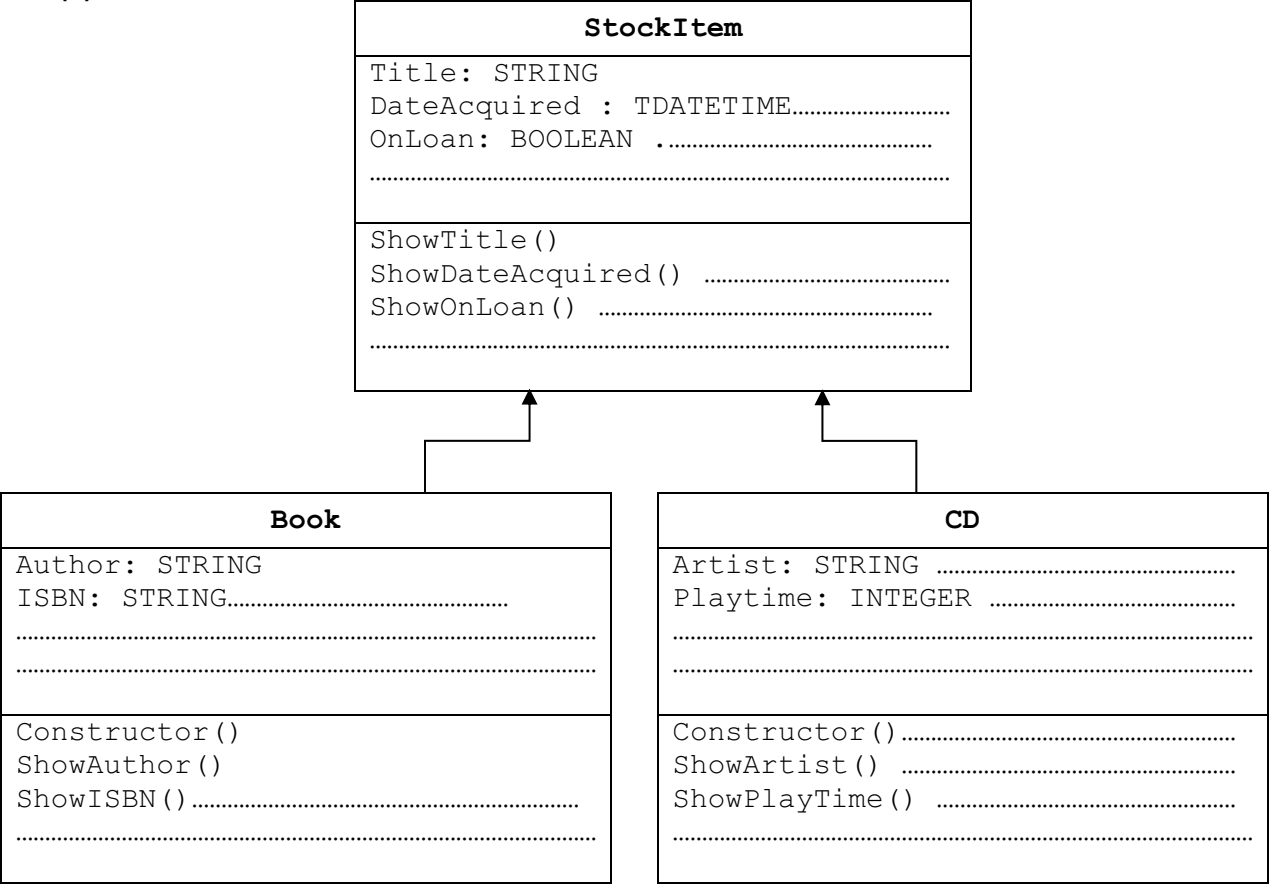

[max. 7]

Page 5	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

(b) (i) *Mark as follows:*

Class header

Methods

Properties

Pascal

```

StockItem = CLASS
    PUBLIC
        Procedure ShowTitle();
        Procedure ShowDateAcquired();
        Procedure ShowOnLoan();
    PRIVATE
        Title : STRING;
        DateAcquired : TDateTime;
        OnLoan : Boolean;
END;
```

Python

```

class StockItem :
    def __int__(self) :
        self.__Title = ""
        self.__DateAquired = ""
        self.__OnLoan = False

    def ShowTitle() :
        pass
    def ShowDateAcquired() :
        pass
    def ShowOnLoan() :
        pass
```

VB.NET

```

Class StockItem
    Public Sub ShowTitle()
    End Sub
    Public Sub ShowDateAquired()
    End Sub
    Public Sub ShowOnLoan()
    End Sub
    Private Title As String
    Private DateAquired As Date
End Class
```

[3]

Page 6	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

- (ii) *Mark as follows:*
 Class header and showing superclass
 Methods
 Properties

Pascal

```

TYPE Book = CLASS (StockItem)
    PUBLIC
        Procedure ShowAuthor();
        Procedure ShowISBN();
    PRIVATE
        Author : STRING;
        ISBN : STRING;
END;
```

Python

```

class Book(StockItem) :
    def __init__(self) :
        self.__Author = ""
        self.__ISBN = ""
    def ShowAuthor() :
        pass
    def ShowISBN() :
        pass
```

VB.NET

```

Class Book : Inherits StockItem
    Public Sub ShowAuthor()
    End Sub
    Public Sub ShowISBN()
    End Sub
    Private Author As String
    Private ISBN As String ` reject integer
End Class
```

[3]

Page 7	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

(iii) Pascal

```

NewBook := Book.Create;
NewBook.Title := 'Computers';
NewBook.Author := 'A.Nyone';
NewBook.ISBN := '099111';
NewBook.DateAcquired := '12/11/2001';
NewBook.OnLoan := FALSE

```

1

1

1

Python

```

NewBook = Book()
NewBook.Title = "Computers"
NewBook.Author = "A.Nyone"
NewBook.ISBN = "099111"
NewBook.DateAcquired = "12/11/2001"
NewBook.OnLoan = False

```

1

1

1

VB.NET

```

Dim NewBook As Book = New Book()
NewBook.Title = "Computers"
NewBook.Author = "A.Nyone"
NewBook.ISBN = "099111"
NewBook.DateAcquired = #12/11/2001#
NewBook.OnLoan = False

```

1


1

1

[3]

Page 8	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

4 (a)

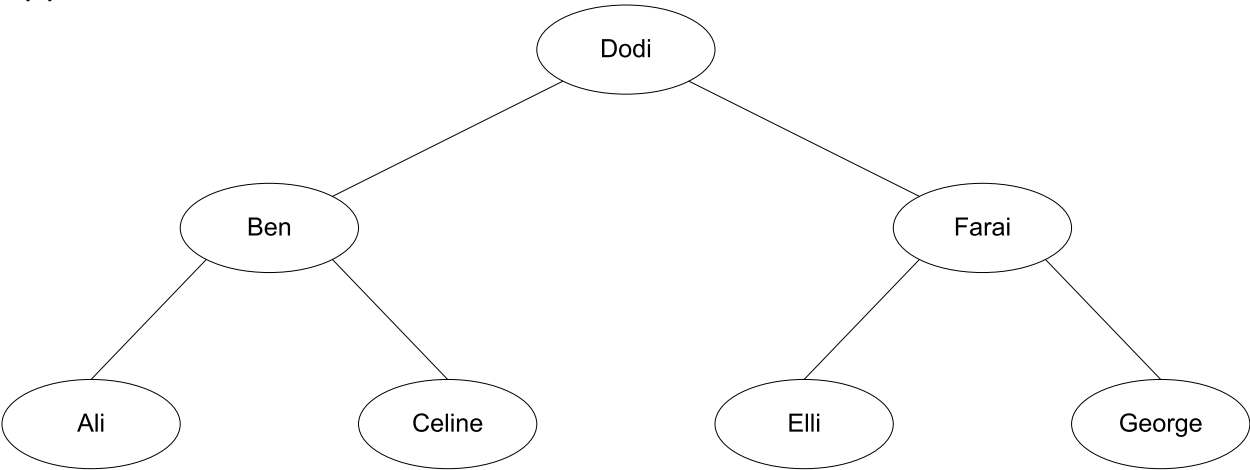

[4]

(b)

Tree			
RootPointer		Name	LeftPointerRightPointer
1	[1]	Dodi	52
	[2]	Farai	34
	[3]	Elli	00
	[4]	George	00
	[5]	Ben	76
	[6]	Celine	00
	[7]	Ali	00
	[8]		90
	[9]		100
	[10]		00

FreePointer

8

[7]

Page 9	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

- (c) (i) 01 PROCEDURE TraverseTree (BYVALUE Root : INTEGER)
 02 IF Tree[Root].LeftPointer < > 0
 03 THEN
 04 TraverseTree (Tree[Root].LeftPointer)
 05 ENDIF
 06 OUTPUT Tree[Root].Name
 07 IF Tree[Root].RightPointer < > 0
 08 THEN
 09 TraverseTree (Tree[Root].RightPointer)
 10 ENDIF
 11 ENDPROCEDURE [5]
- (ii) A procedure that calls itself // is defined in terms of itself
 Line number: 04/09 [2]
- (iii) TraverseTree (RootPointer) [1]

5 (a)

MembershipFile

Address	MemberID	other member data
0	0	
1	1001	
2	7002	
3	0	
4	0	
5	3005	
6	0	
7	0	
8	0	
:	:	
:	:	
96	4096	
97	0	
98	2098	
99	0	

1001 and 7002 and 3005 1
 4096 and 2098 1 [2]

Page 10	Mark Scheme	Syllabus	Paper
	Cambridge International A Level – October/November 2015	9608	43

- (b) (i) 10 // generate record address
 20 NewAddress ← Hash(NewMember.MemberID)
 30 // move pointer to the disk address for the record
 40 SEEK NewAddress
 50 PUTRECORD "MembershipFile", NewMember [4]
- (ii) 01 TRY
 02 OPENFILE "MembershipFile" FOR RANDOM
 03 EXCEPT
 04 OUTPUT "File does not exist"
 05 ENDTRY [2]
- (iii) collisions/synonyms
 The previous record will be overwritten [2]
- (iv) Create an overflow area
 The 'home' record has a pointer to others with the same key
OR
 Store the overflow record at the next available address
 in sequence
OR
 Re-design the hash function
 to generate a wider range of indexes // to create fewer collisions [2]
- (v) 41 GETRECORD "MembershipFile", CurrentRecord
 42 WHILE CurrentRecord.MemberID <> 0
 43 NewAddress ← NewAddress + 1
 44 IF NewAddress > 99 THEN NewAddress ← 0
 45 SEEK NewAddress
 46 GETRECORD "MembershipFile", CurrentRecord
 47 ENDWHILE [max. 4]