



# Mark Scheme (Pre-Standardisation)

November 2020

Pearson Edexcel International GCSE  
In Computer Science (4CP0/01)  
Paper 1: Principles of Computer Science

## **Edexcel and BTEC Qualifications**

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at [www.edexcel.com](http://www.edexcel.com) or [www.btec.co.uk](http://www.btec.co.uk). Alternatively, you can get in touch with us using the details on our contact us page at [www.edexcel.com/contactus](http://www.edexcel.com/contactus).

## **Pearson: helping people progress, everywhere**

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: [www.pearson.com/uk](http://www.pearson.com/uk)

Autumn 2020

Publications Code 4CP0\_01\_2011\_MS

All the material in this publication is copyright

© Pearson Education Ltd 2020

## General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Additional Guidance                                                                                                                                                                                             | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1(a)            | <p>Any <b>two</b> from:</p> <ul style="list-style-type: none"> <li>• (Share) access to the Internet/WWW/broadband connection (1)</li> <li>• (Internal) communication (using email/instant messaging/calendars) (1)</li> <li>• Share files/data (1)</li> <li>• Share peripherals/printers / hardware (1)</li> <li>• Increases the amount of storage (since network storage devices can be attached) (1)</li> <li>• Saves money on licences (since network site licences for software are usually cheaper than buying a stand-alone licence for every machine) (1)</li> <li>• Centralised backup (1)</li> <li>• Centralised security (1)</li> </ul> | <ul style="list-style-type: none"> <li>• Award examples if mapped to a bullet point</li> <li>• Do not award the same bullet more than once</li> <li>• Do not award for install updates (in the stem)</li> </ul> | 2    |

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                      | Additional Guidance                                     | Mark |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------|
| 1(b) (i)        | <p>Any <b>two</b> from:</p> <ul style="list-style-type: none"> <li>• <del>Faster (data transfer) (1)</del> Not really true, its Greater bandwidth / more bits per second (1)</li> <li>• The connection does not get worse the further you are from the router / more reliable (1)</li> <li>• Connection does not get obstructed by walls, ceilings, and furniture (1)</li> <li>• More secure (1)</li> </ul> | Accept reverse arguments for disadvantages of wireless. | 2    |

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                            | Additional Guidance                                  | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------|
| 1(b) (ii)       | <p>Any <b>two</b> from:</p> <ul style="list-style-type: none"> <li>• Installation/<b>maintenance</b> is more complex (1)</li> <li>• Devices need to be physically connected (1)</li> <li>• Less portable / limited by length of cable (1)</li> <li>• Limited number of devices can be connected (1)</li> <li>• Some digital devices cannot use a wired connection (1)</li> <li>• Trip hazard (1)</li> </ul>                                       | Accept reverse arguments for advantages of wireless. | 2    |
| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                            | Additional Guidance                                  | Mark |
| 1(c)            | <p>Award <b>two</b> marks for a linked description that addresses the individual mark points:</p> <p>The internet is a (global) network of networks/ connected devices (1) whereas the www is the collection of web pages/service accessed using the internet (1) / <b>the www is resources located via URLs/domain names (1)</b></p> <p>The internet is the infrastructure (1) and the www is a service that runs on that infrastructure (1)</p> |                                                      | 2    |
| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                            | Additional Guidance                                  | Mark |

|      |                                                                                                                                                                                                                                                                                     |  |   |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|
| 1(d) | <p>Award <b>two</b> marks for a linked explanation such as:</p> <p>Running out of IPv4 addresses/the number of (internet) connected devices has grown (1)</p> <p>IPv6 addresses are long/longer than IPv4 / the number of possible addresses is large/will last much longer (1)</p> |  | 2 |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
| 1(e)(i)         | Star   |                     | 1    |

| Question Number | Answer                                                                                                                                                                                                                                                          | Additional Guidance | Mark |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 1(e) (ii)       | <p>Any <b>one</b> from:</p> <ul style="list-style-type: none"> <li>• easy to connect/remove new nodes (1)</li> <li>• failure of one node/link does not affect the rest of the network (1)</li> <li>• easy to detect the failure of one node/link (1)</li> </ul> |                     | 1    |

| Question Number | Answer                                                                                                                                                                                                                                                                                                                          | Additional Guidance | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 1(e) (iii)      | <p>Any <b>one</b> from:</p> <ul style="list-style-type: none"> <li>• if central switch/hub fails then the whole network fails (1)</li> <li>• performance and number of nodes that can be added depends on capacity of central switch/hub (1)</li> <li>• can require more cable than some of the other topologies (1)</li> </ul> |                     | 1    |

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
|-----------------|--------|---------------------|------|

|         |                                                                                                                               |  |   |
|---------|-------------------------------------------------------------------------------------------------------------------------------|--|---|
| 1(f)(i) | Any <b>two</b> from: <ul style="list-style-type: none"> <li>• SMTP (1)</li> <li>• IMAP (1)</li> <li>• POP/POP3 (1)</li> </ul> |  | 2 |
|---------|-------------------------------------------------------------------------------------------------------------------------------|--|---|

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                   | Additional Guidance                              | Mark |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|------|
| 1(f)(ii)        | Any <b>two</b> from: <ul style="list-style-type: none"> <li>• passes the (reassembled) packets to the application layer (1)</li> <li>• check if all packets have arrived (1)</li> <li>• determine whether the contents are correct (1)</li> <li>• requests resending of lost or damaged packets (1)</li> <li>• reassembles packets in correct order/ <b>into an email</b> (1)</li> </ul> | Do not accept receives from network layer (stem) | 2    |

| Question Number | Answer                                                                                                                                  | Additional Guidance | Mark |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 2(a)(i)         | 1101 1110<br><br>Award one mark for: <ul style="list-style-type: none"> <li>MSB = 1 (1)</li> <li>Rest of pattern correct (1)</li> </ul> |                     | 2    |

| Question Number | Answer           | Additional Guidance | Mark |
|-----------------|------------------|---------------------|------|
| 2(a)(ii)        | - (1)<br>119 (1) |                     | 2    |


| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
| 2(b)            | B 16   |                     | 1    |

| Question Number | Answer | Additional Guidance   | Mark |
|-----------------|--------|-----------------------|------|
| 2(c)(i)         | 128    | Allow the range 0-127 | 1    |

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
| 2(c)(ii)        | C      |                     | 1    |

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
|                 |        |                     |      |

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |   |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|
| 2(c)(iii) | <p>Award <b>two</b> marks for a linked explanation such as:</p> <p>(Before Unicode existed) there are hundreds of different encoding systems (1) and no single encoding system could contain enough characters to represent all major languages (1)</p> <p>Standard ASCII only provides 128 different patterns (1) can't represent all major languages/symbols/characters (1)</p> <p>Unicode uses a minimum of 16 bits (1) so can represent at least <math>2^{16}</math> characters (1)</p> <p>Unicode has very large number of characters (1)<br/>can represent all languages/ASCII was developed (just) for English (1)</p> |  | 2 |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|
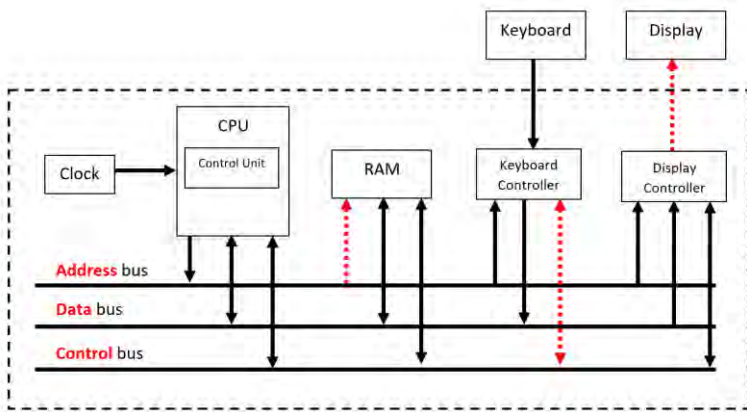
| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Additional Guidance | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 3(a)            |  <p>The diagram illustrates a computer system architecture. A dashed box encloses the internal components: a CPU (containing a Control Unit), RAM, a Keyboard Controller, and a Display Controller. A Clock is connected to the CPU. The CPU, RAM, Keyboard Controller, and Display Controller are all connected to three system buses: the Address bus, the Data bus, and the Control bus. The Address bus is shown with a red dotted arrow pointing from the CPU to the RAM. The Data bus is shown with solid black arrows indicating bidirectional communication between the CPU, RAM, Keyboard Controller, and Display Controller. The Control bus is shown with solid black arrows indicating bidirectional communication between the CPU, RAM, Keyboard Controller, and Display Controller. Outside the dashed box, the Keyboard is connected to the Keyboard Controller, and the Display is connected to the Display Controller. A red dotted arrow points from the Display Controller to the Display.</p> <ul style="list-style-type: none"> <li>• <b>Address bus</b> labelled correctly (1)</li> <li>• <b>Data bus</b> labelled correctly (1)</li> <li>• <b>Control bus</b> labelled correctly (1)</li> <li>• Arrow from address bus to RAM (1)</li> <li>• Bi-Directional arrows from control bus to keyboard controller (1)</li> <li>• Arrow points from display controller to display (1)</li> </ul> |                     | 6    |

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                  | Additional Guidance | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 3(b)            | <p>Award <b>two</b> marks for a linked explanation such as:</p> <p>The cache stores frequently used data/instructions (1) so the processor does not have to wait because cache is checked before main memory / because RAM is further away from the processor (1).</p> <p>It speeds up processing (1) because cache is a faster type of memory (1).</p> |                     | 2    |

| Question Number  | Answer                                                                                                                                                                                                   | Additional Guidance | Mark |            |                |                  |                |                 |  |                                                                                                                            |   |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|------------|----------------|------------------|----------------|-----------------|--|----------------------------------------------------------------------------------------------------------------------------|---|
| 3(c)             | <table><tr><th>CPU1</th><th>CPU2</th></tr><tr><td>5 * 2 = 10</td><td>4 * 3 = 12 (1)</td></tr><tr><td>10 + 12 = 22 (1)</td><td>24 / 4 = 6 (1)</td></tr><tr><td>22 - 6 = 16 (1)</td><td></td></tr></table> | CPU1                | CPU2 | 5 * 2 = 10 | 4 * 3 = 12 (1) | 10 + 12 = 22 (1) | 24 / 4 = 6 (1) | 22 - 6 = 16 (1) |  | <p>The second row expressions can be in either column</p> <p>22 - 6 = 16<br/>May appear in either CPU in the final row</p> | 4 |
| CPU1             | CPU2                                                                                                                                                                                                     |                     |      |            |                |                  |                |                 |  |                                                                                                                            |   |
| 5 * 2 = 10       | 4 * 3 = 12 (1)                                                                                                                                                                                           |                     |      |            |                |                  |                |                 |  |                                                                                                                            |   |
| 10 + 12 = 22 (1) | 24 / 4 = 6 (1)                                                                                                                                                                                           |                     |      |            |                |                  |                |                 |  |                                                                                                                            |   |
| 22 - 6 = 16 (1)  |                                                                                                                                                                                                          |                     |      |            |                |                  |                |                 |  |                                                                                                                            |   |

| Question Number | Answer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Additional Guidance | Mark |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 3(d)            | <p>Any four from:</p> <ul style="list-style-type: none"> <li>• The OS checks whether sufficient space is available on the storage (media) for the file (1).</li> <li>• The file is broken into blocks (1)</li> <li>• The blocks are stored in spaces that are large enough (1)</li> <li>• OS looks for (fat/ntfs)/ reserves (linux) (groups of) contiguous blocks (1)</li> <li>• Blocks can reside anywhere on the storage (1).</li> <li>• The OS updates the file allocation table (with the start location and sequence number of each block) (1)</li> <li>• OS sets hard links to files (1) ntfs</li> <li>• OS updates journal/MFT (1) ntfs/linux</li> <li>• Metadata about the file such as read/write permissions, date created and last accessed is separately stored (1)</li> </ul> |                     | 4    |

| Question Number | Answer                                             | Additional Guidance | Mark |
|-----------------|----------------------------------------------------|---------------------|------|
| 4(a)(i)         | Digital (signal) / converted analogue (signal) (1) |                     | 1    |

| Question Number | Answer                                        | Additional Guidance | Mark |
|-----------------|-----------------------------------------------|---------------------|------|
| 4(a)(ii)        | Analogue (signal) / analogue (sound wave) (1) |                     | 1    |

| Question Number | Answer                  | Additional Guidance                                                                                                    | Mark |
|-----------------|-------------------------|------------------------------------------------------------------------------------------------------------------------|------|
| 4(a)(iii)       | 2 Hertz / hertz /Hz (1) | <ul style="list-style-type: none"> <li>Do not penalise spelling</li> <li>Accept 2 samples/cycles per second</li> </ul> | 1    |

| Question Number | Answer                                                                                                                                                                                                                                                                                                   | Additional Guidance | Mark |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 4(a)(iv)        | Any <b>one</b> mark for: <ul style="list-style-type: none"> <li>The (analogue sound) wave will be represented more accurately / the fidelity/quality of the recording is improved (1)</li> <li>The file size will increase / <b>more data stored</b> (as each sample takes up disk space) (1)</li> </ul> |                     | 1    |

| Question Number | Answer                                                                                                                                                                                                                                                               | Additional Guidance | Mark |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 4(a)(v)         | <ul style="list-style-type: none"> <li>3 (1)</li> <li>The range of sampled sound is from 0-6. To store 7 distinct values, you need 3 bits (111 binary = 7 denary) (1)<br/> <b>OR graph shows 8 possible values, 3 bits can store 0 - 7 / 8 values (1)</b></li> </ul> |                     | 2    |

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
|-----------------|--------|---------------------|------|

|          |                              |                      |   |
|----------|------------------------------|----------------------|---|
| 4(a)(vi) | Correct binary value 101 (1) | Ignore leading zeros | 1 |
|----------|------------------------------|----------------------|---|

| Question Number | Answer                                                                                                                                                                                                                                                                                                                          | Additional Guidance          | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------|
| 4(b)            | <p>819 seconds * 8 bytes * 47,000 hertz</p> <p><math>819 \times 8 \times 47000</math></p> <p>819 seconds * <math>64 \div 8</math> bytes * 47,000 hertz</p> <p><math>\frac{818 \times 64 \times 47000}{8}</math></p> <p>819 (1)</p> <p>8 or <math>64 \div 8</math> (1)</p> <p>47,000 (1)</p> <p>Fully correct expression (1)</p> | Award equivalent expressions | 4    |

| Question Number | Answer                                                                                                                                                                                                | Additional Guidance | Mark |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 4(c)            | <p>Any <b>one</b> from:</p> <ul style="list-style-type: none"> <li>The sound quality may be poorer/lower (for some people) (1)</li> <li>Cannot get the original back after compression (1)</li> </ul> |                     | 1    |

| Question Number | Answer                                                                                                                                                                                                                       |          |          |               |                       | Additional Guidance                              | Mark |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|---------------|-----------------------|--------------------------------------------------|------|
| 5(a)            | <b>P</b>                                                                                                                                                                                                                     | <b>Q</b> | <b>R</b> | <b>Q OR R</b> | <b>P AND (Q OR R)</b> | Allow follow through for incorrect mark point 2. | 3    |
|                 | 0                                                                                                                                                                                                                            | 0        | 0        | 0             | 0                     |                                                  |      |
|                 | 0                                                                                                                                                                                                                            | 0        | 1        | 1             | 0                     |                                                  |      |
|                 | 0                                                                                                                                                                                                                            | 1        | 0        | 1             | 0                     |                                                  |      |
|                 | 0                                                                                                                                                                                                                            | 1        | 1        | 1             | 0                     |                                                  |      |
|                 | 1                                                                                                                                                                                                                            | 0        | 0        | 0             | 0                     |                                                  |      |
|                 | 1                                                                                                                                                                                                                            | 0        | 1        | 1             | 1                     |                                                  |      |
|                 | 1                                                                                                                                                                                                                            | 1        | 0        | 1             | 1                     |                                                  |      |
|                 | 1                                                                                                                                                                                                                            | 1        | 1        | 1             | 1                     |                                                  |      |
|                 | Award <b>one</b> mark for each of: <ul style="list-style-type: none"><li>• All possible combinations in columns P, Q and R (1)</li><li>• Correct values in Q or R (1)</li><li>• Correct values in final column (1)</li></ul> |          |          |               |                       |                                                  |      |

| Question Number | Answer                                                                                               | Additional Guidance                                                               | Mark |
|-----------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|
| 5(b)            | B AND S AND NOT L<br>Award <b>one</b> mark for each of:<br>NOT L or B AND S (1)<br>Fully correct (1) | <ul style="list-style-type: none"> <li>• Any order and ignore brackets</li> </ul> | 2    |

| Question Number | Answer                                                                                                                                                                               | Additional Guidance | Mark |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 5(c)            | Any <b>two</b> of: <ul style="list-style-type: none"> <li>• Remove code vulnerabilities in programming languages (1).</li> <li>• Eliminate bad programming practices (1).</li> </ul> |                     | 2    |

| Question Number | Answer                                                                                                                                                                           | Additional Guidance | Mark |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 5(d)            | Award <b>one</b> mark each for any of: <ul style="list-style-type: none"> <li>• Copyright (1)</li> <li>• Patent (1)</li> <li>• Licensing (1)</li> <li>• Trademark (1)</li> </ul> |                     | 3    |




| Question Number | Answer                                                                        | Additional Guidance | Mark |
|-----------------|-------------------------------------------------------------------------------|---------------------|------|
| 6(a)            | Indicative content provided<br>Other solutions do exist and should be awarded |                     | 6    |

| Aspect of Solution          | Marks                |                                                                                                                             |                                                                                                       |                                                                                       |
|-----------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                             | 0                    | 1                                                                                                                           | 2                                                                                                     | 3                                                                                     |
| <b>Functionality</b>        | No awardable content | There are significant errors in logic, leading to an overall solution that is non-functional                                | There are minor errors in logic, leading to an overall solution that is not completely functional     | There are no errors in logic, leading to an overall solution that is fully functional |
| <b>Accuracy of Notation</b> | No awardable content | Notation follows a broadly unrecognisable convention that is applied inconsistently, although aspects of it are discernible | Notation follows a recognisable convention which is broadly discernible but is applied inconsistently | Notation follows a recognisable convention and is applied consistently throughout     |

There are a maximum of 3 marks for functionality.

There are a maximum of 3 marks for accuracy of notation.

The marks for functionality and accuracy are awarded independently.

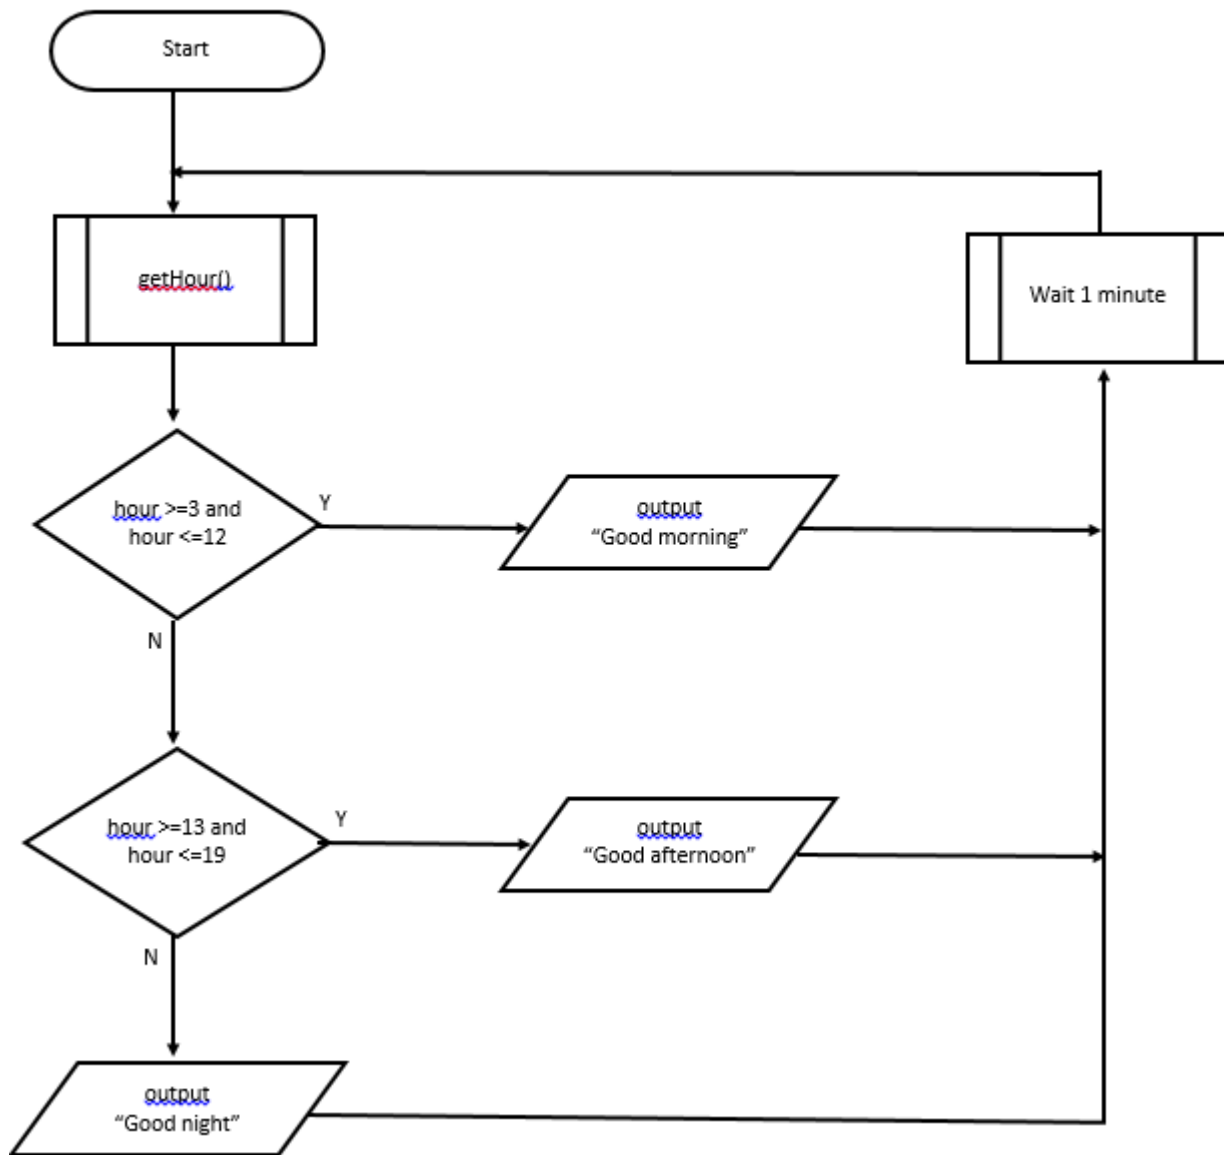

| Question Number | Answer                                                                                                             | Additional Guidance | Mark |
|-----------------|--------------------------------------------------------------------------------------------------------------------|---------------------|------|
| 6(b)(i)         | <ul style="list-style-type: none"> <li>• papaya needs changing (1)</li> <li>• lychee needs ordering (1)</li> </ul> |                     | 2    |

| Question Number | Answer | Additional Guidance | Mark |
|-----------------|--------|---------------------|------|
| 6(b)(ii)        | 7 (1)  |                     | 1    |

| Question Number | Answer                                                                                                                                                  | Additional Guidance                                                  | Mark |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------|
| 6(b)(iii)       | Replace 8 with LENGTH(flavours)/LENGTH(volume) (1)<br>or<br>A new line 7:<br>WHILE i < LENGTH(flavours) DO (1)<br>or<br>WHILE i < LENGTH(volume) DO (1) | Ignore case<br><br>If new line is given award mark if logic is clear | 1    |

| Question<br>Number | Answer | Mark |
|--------------------|--------|------|
|--------------------|--------|------|

|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |   |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| 6(c) | <p>Indicative content:</p> <p><b>Compiler</b></p> <ul style="list-style-type: none"> <li>• One line of a compiled language maps to multiple executable instructions</li> <li>• Reads in a whole file and translates it at once</li> <li>• Produces an executable file</li> <li>• Executable file is portable between machines with the same architecture and operating systems</li> <li>• End-user cannot see the programming source code</li> <li>• Does not need an additional environment/software to run the code</li> </ul> <p><b>Interpreter</b></p> <ul style="list-style-type: none"> <li>• One line of a compiled language maps to multiple executable instructions</li> <li>• Reads, translates, and executes one line at a time</li> <li>• A special environment is needed to be installed on the user's machine to run the code; this is machine specific</li> <li>• Source code is portable to any machine with an interpreter which can run on it</li> <li>• End-user can see the programming source code</li> </ul> <p><b>Similarities</b></p> <ul style="list-style-type: none"> <li>• One line of a compiled language maps to multiple executable instructions/one to many relationship to machine code</li> <li>• Both are used to interpret high level programming languages</li> <li>• Both produce machine code from human-readable programming code</li> </ul> <p><b>Differences</b></p> <ul style="list-style-type: none"> <li>• Compiler reads in a whole file and translates it at once. Interpreter reads, translates and executes one line at a time</li> <li>• Compiler produces an executable file, interpreter does not</li> <li>• Executable files produced by a compiler will only execute on machines with the same architecture and operating systems. Source code produced by an interpreter is portable to any machine with an interpreter which can run on it</li> <li>• Compiled code does not require any additional software</li> </ul> | 6 |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|

|  |                                                                                                                                                 |  |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | to execute the code. An interpreter needs a special environment to be installed on the user's machine to run the code; this is machine specific |  |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------|--|

| Level   | Mark | Descriptor                                                                                                                                                                                                                                                                                                                              |
|---------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | 0    | No rewardable content.                                                                                                                                                                                                                                                                                                                  |
| Level 1 | 1–2  | <p>Basic, independent points are made showing elements of knowledge and understanding of key concepts/principles of computer science.</p> <p>The discussion will contain basic information with little linkage between points made.</p>                                                                                                 |
| Level 2 | 3–4  | <p>Demonstrates adequate knowledge and understanding of key concepts/principles of computer science.</p> <p>The discussion shows some linkages and lines of reasoning with some structure.</p>                                                                                                                                          |
| Level 3 | 5–6  | <p>Demonstrates comprehensive knowledge and understanding by selecting relevant knowledge and understanding of key concepts/principles of computer science to support the discussion being presented.</p> <p>The discussion shows a well-developed, sustained line of reasoning which is clear, coherent, and logically structured.</p> |

